




Panel height " (mm)	Post type " (mm)	Post height " (mm)	Module weight lb/ft ² (kg/m ²)
36 5/8" (930)	2 3/8" x 9/32" (≠60x7)	47 1/4" (1200)	2,5 (12,2)
47" (1195)	2 3/8" x 9/32" (≠60x7)	57 11/16" (1465)	2,4 (11,7)
52" (1320)	2 3/8" x 9/32" (≠60x7)	65" (1650)	2,4 (11,6)
57 1/2" (1460)	2 3/8" x 9/32" (≠60x7)	70 1/2" (1790)	2,4 (11,5)
67 3/4" (1720)	2 3/8" x 9/32" (≠60x7)	82 1/16" (2085)	2,3 (11,3)
78 1/8" (1985)	2 3/8" x 9/32" (≠60x7)	92 1/2" (2350)	2,3 (11,1)

Material: (Fe360B UNI 7070) S235 JR EN 10025
 Surface treatment: hot dip galvanizing UNI EN ISO 1461

Apollo 2



Post with base plate

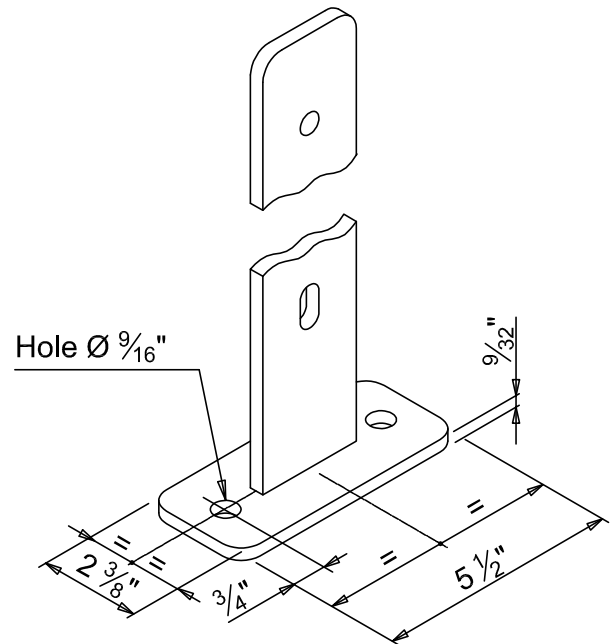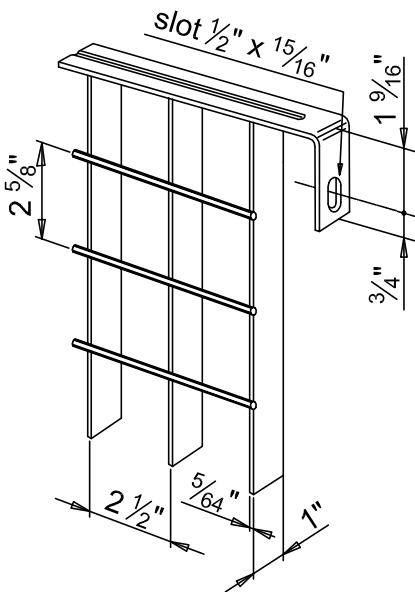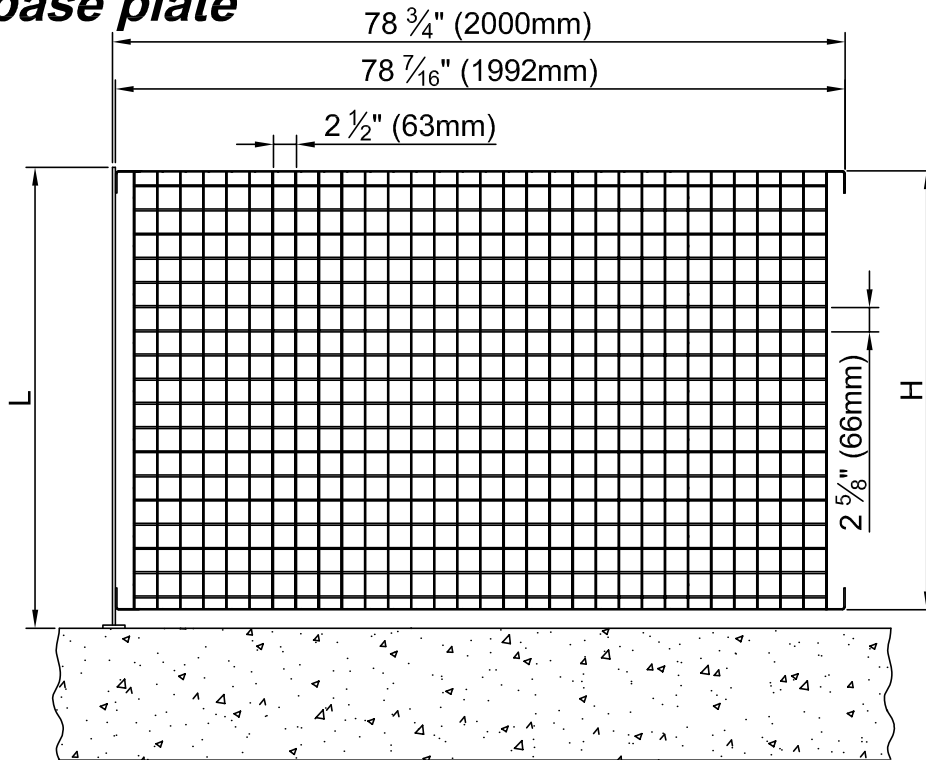




Panel height " (mm)	Post type " (mm)	Post height " (mm)	Module weight lb/ft ² (kg/m ²)
36 5/8" (930)	2 3/8" x 9/32" (≠60x7)	38 15/16" (990)	2,5 (12,1)
47" (1195)	2 3/8" x 9/32" (≠60x7)	49 7/16" (1255)	2,4 (11,6)
52" (1320)	2 3/8" x 9/32" (≠60x7)	54 5/16" (1380)	2,4 (11,5)
57 1/2" (1460)	2 3/8" x 9/32" (≠60x7)	59 3/16" (1520)	2,3 (11,3)
67 3/4" (1720)	2 3/8" x 9/32" (≠60x7)	70 1/16" (1780)	2,3 (11,1)
78 1/8" (1985)	2 3/8" x 9/32" (≠60x7)	80 1/2" (2045)	2,3 (11,0)

Material: (Fe360B UNI 7070) S235 JR EN 10025
 Surface treatment: hot dip galvanizing UNI EN ISO 1461

Apollo 2



STYLE post

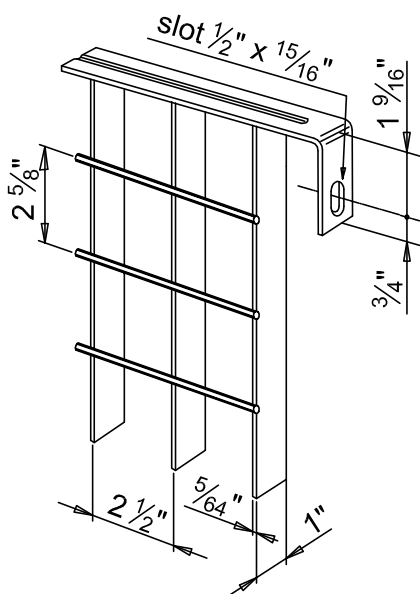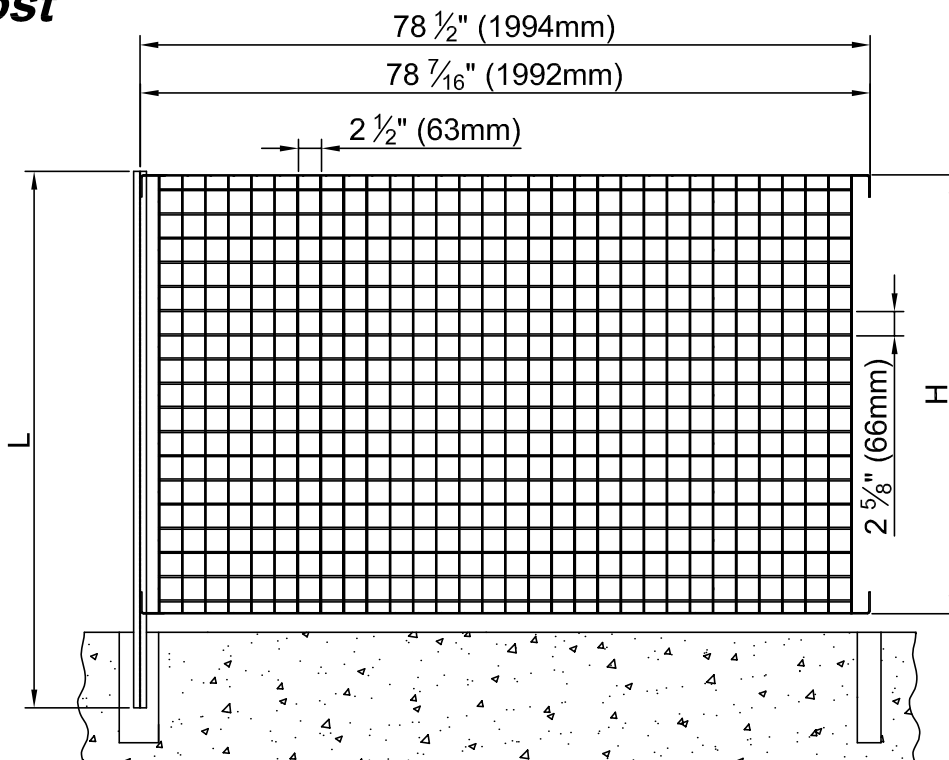




Panel height " (mm)	Post type	Post height " (mm)	Module weight lb/ft ² (kg/m ²)
36 5/8" (930)	STYLE	47 1/4" (1200)	2,4 (11,6)
47" (1195)	STYLE	57 11/16" (1465)	2,3 (11,1)
52" (1320)	STYLE	65" (1650)	2,3 (11,1)
57 1/2" (1460)	STYLE	70 1/2" (1790)	2,2 (10,9)
67 3/4" (1720)	STYLE	82 1/16" (2085)	2,2 (10,7)
78 1/8" (1985)	STYLE	92 1/2" (2350)	2,2 (10,6)

Material: (Fe360B UNI 7070) S235 JR EN 10025
 Surface treatment: hot dip galvanizing UNI EN ISO 1461

Apollo 2



STYLE post with plate

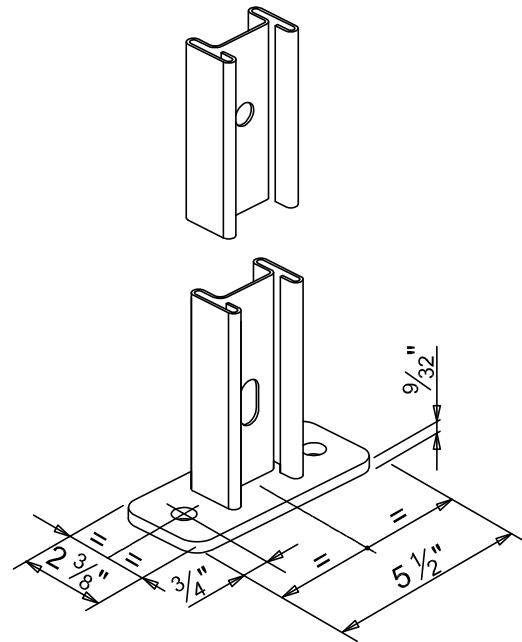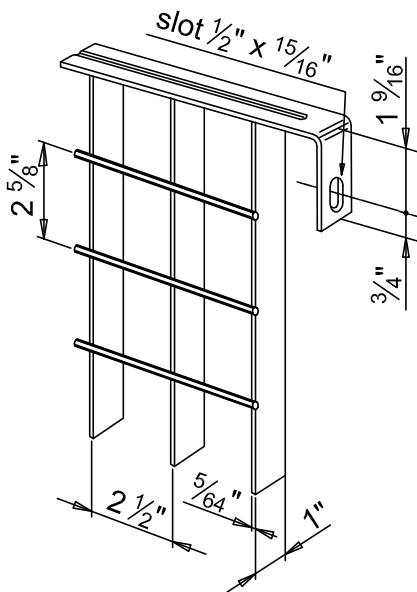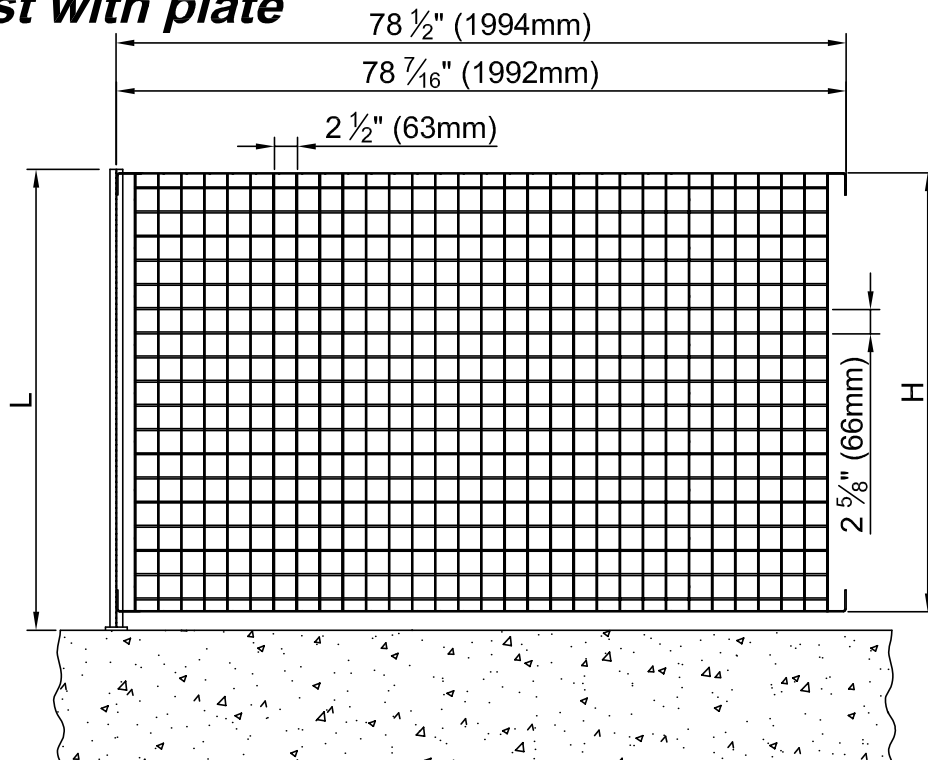

Panel height " (mm)	Post type	Post height " (mm)	Module weight lb/ft ² (kg/m ²)
36 ⁵ / ₈ " (930)	STYLE	38 ¹⁵ / ₁₆ " (990)	2,4 (11,6)
47" (1195)	STYLE	49 ⁷ / ₁₆ " (1255)	2,3 (11,1)
52" (1320)	STYLE	54 ⁵ / ₁₆ " (1380)	2,3 (11,0)
57 ¹ / ₂ " (1460)	STYLE	59 ³ / ₁₆ " (1520)	2,2 (10,9)
67 ³ / ₄ " (1720)	STYLE	70 ¹ / ₁₆ " (1780)	2,2 (10,6)
78 ¹ / ₈ " (1985)	STYLE	80 ¹ / ₂ " (2045)	2,2 (10,5)

Material: (Fe360B UNI 7070) S235 JR EN 10025
 Surface treatment: hot dip galvanizing UNI EN ISO 1461